

# HCV01 CHECK VALVE



## HCV01

The HCV01 check valve is designed to fit between two ASME BPE compliant clamp fittings, sealing on the ID of the tube using FDA approved EPDM O-rings. The compact 316/316L stainless steel design is suitable for a wide range of duties in steam, liquid and gas service, including pressure relieving and anti-vacuum applications. Standard valves are available with either metal-metal or EPDM soft seat seal. The standard opening pressure for the HCV01 is either 8 or 35 mbar when installed horizontally. The HCV01 has a cast internal barrel which limits the certifiable surface finish. Where a specified surface finish is required, the HCV01B is available. The HCV01B is manufactured entirely from bar-stock material with all surfaces finished to 0.5 microns Ra as standard.

<b>P Pressure Rating</b>	Up to 50 barg
<b>T Temperature Rating</b>	135°C with EPDM seals
<b>Connections</b>	To suit 3/4" - 4" ASME BPE clamp fittings
<b>Wetted Parts</b>	316 /316L stainless steel
<b>Seal Material</b>	Body seals - EPDM Seat seal - metal-metal or EPDM
<b>Opening Pressure</b>	8 or 35 mbar
<b>Surface Finish</b>	Body and valve head - 0.5 microns Ra Piston surfaces - 1.2-1.6 microns Ra
<b>Options</b>	100 or 240 mbar opening pressure Viton, silicone or Kalrez body and seat seals Clamp with tab to identify valve presence Enhanced surface finish - HCV01B
<b>Certification</b>	Certificate of conformity Material certification FDA Elastomer compliance certificate Certified 'Animal Derived Ingredient' free

- ★ Features**
- Simple to install - fits between ferrules using a standard clamp
  - Integral o-rings eliminate need for additional seal
  - Suitable for steam, liquid and gas applications
  - Wide range of spring and seal options



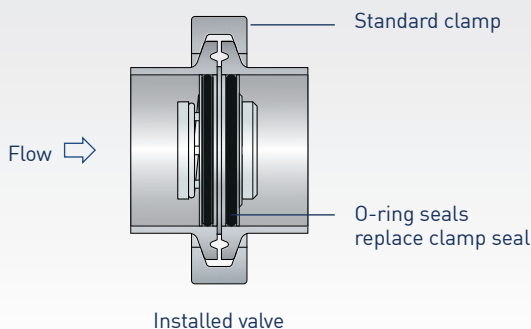


Illustration showing optional seat seal (6) fitted

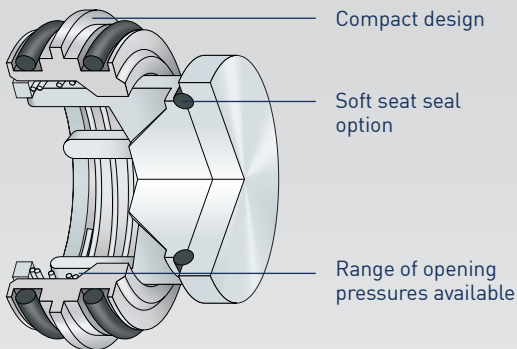


Part	Description	
1	Body	316L stainless steel
2	Valve head	316L stainless steel
3	Piston	316 stainless steel (cast)
4	Spring	316 stainless steel
5	Body seals	EPDM
6	Optional seat seal	EPDM

	Flow	Effect on opening pressure due to valve orientation (mbar)						
		3/4"	1"	1-1/2"	2"	2-1/2"	3"	4"
8 mbar spring	↔	0	0	0	0	0	0	0
	↑	+4	+4	+4	+4	+4	+5	+7
	↓	-4	-4	*	*	*	*	*
Other spring ranges	↑	+4	+4	+4	+4	+5	+5	+7
	↓	-4	-4	-4	-4	-5	-5	-7

\*Valves not suitable for orientation with flow downward when fitted with 8 mbar spring as valve may fail to close due to the piston and head weight overcoming the spring closing force

**Service Parts** - Body seal kit - 2 seals (5) per set

Note - 3/4" to 4" valves with soft seat seal are non-maintainable as the seat seal is captive. Body seals are still available for soft seated valves

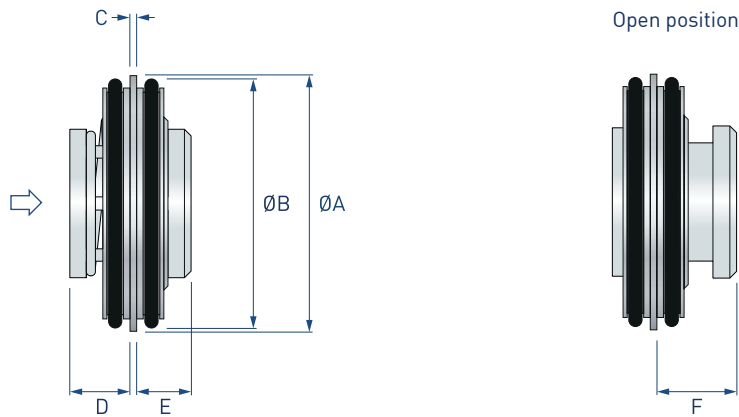

Size ASME BPE	Dimensions (mm)						Kv(m³/h)	Weight (kg)
	ØA	ØB	C	D	E	F		
3/4"	19.0	15.8	1.6	7.1	11.2	19.8	2	0.01
1"	25.4	22.1	1.6	7.6	13.5	22.6	4	0.03
1-1/2"	38.1	34.8	1.6	16.0	13.5	26.9	8	0.1
2"	50.8	47.5	1.6	16.7	16.8	35.3	18	0.2
2-1/2"	63.5	60.2	1.6	22.4	17.5	39.6	32	0.3
3"	76.2	72.9	1.6	31.8	19.0	50.0	60	0.3
4"	101.6	97.4	1.6	41.4	22.4	61.2	90	1.1

### ASME BPE part number ordering key

Product	Size	Connection	Seal	Spring
-	-	-	-	-
HCV01	3/4" ASME BPE	075	Metal	08
	1" ASME BPE	100	EPDM - black	35
	1-1/2" ASME BPE	150		100
	2" ASME BPE	200		240
	2-1/2" ASME BPE	250		
	3" ASME BPE	300		
	4" ASME BPE	400		

### Example

<b>HCV01</b>	<b>-</b>	<b>075C</b>	<b>-</b>	<b>M</b>	<b>-</b>	<b>08</b>
--------------	----------	-------------	----------	----------	----------	-----------

### Specification text

Staitch HCV01 check valve manufactured in 316L stainless steel with EPDM compliant body seals. 3/4" ASME BPE clamp connections. Metal-metal seating. 8 mbar opening pressure. Body and valve head finished to 0.5 microns Ra with piston surfaces finished to 1.2-1.6 microns Ra. (HCV01-075C-M-08).