

HCV03 CHECK VALVE



HCV03

The HCV03 check valve is designed to fit between two ASME BPE compliant clamp fittings, with a moulded seal profile replacing the standard joint gasket. The valve is suitable for a wide range of duties in liquid and gas service, including pressure relieving and anti-vacuum applications. A number of soft seat seal and spring options are also available. Valve construction materials are FDA compliant.

P Pressure and Temperature

T Max pressure (bar)							
3/4" - 2"	3.8	3.8	2.3	1.7	1.4	1.2	1.2
2-1/2" - 4"	1.4	1.4	0.9	0.6	0.5	0.4	0.35
Max temp (°C)							
	0	38	65	90	121	150	205

C **Connections** To suit 3/4" - 4" ASME BPE clamp fittings

W **Wetted Parts** Body - PTFE
Spring - 316 stainless steel

S **Seal Material** Body seal - PTFE (Integral with valve body)
Seat seal - PTFE (Integral with valve body) or EPDM

O **Opening Pressure** 8 or 35 mbar

SF **Surface Finish** All parts are moulded PTFE with an approximate finish of 1.0 micron Ra

✓ **Options** 100 or 240 mbar opening pressure
Viton and Kalrez seat seals
PTFE coated spring
Clamp with tab to identify presence

C **Certification** Certificate of conformity
FDA elastomer compliance certificates
Certified 'Animal derived ingredient' free

★ Features

- Simple to install - fits between two standard ferrules - no additional seal required
- PTFE construction with stainless steel spring - optional PTFE coated springs available
- Low pressure loss in all sizes
- Optional soft seats for bubble-tight shut off



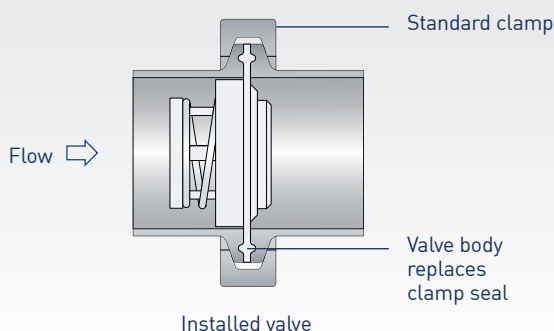


Illustration showing optional seat seal (5) fitted

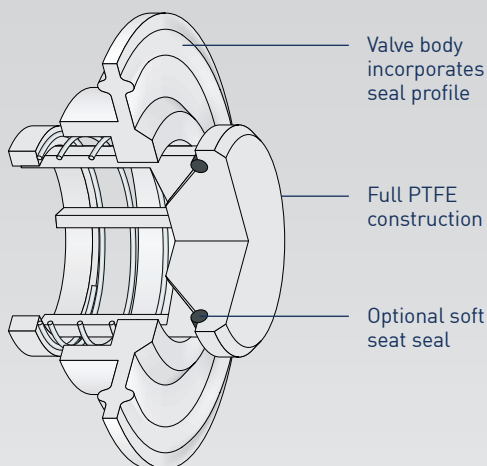

Part	Description
1	Body
2	Valve head
3	Piston
4	Spring*
5	Optional seat seal**


*PTFE coated spring is also available

**Seat seal is FDA compliant

		Effect on opening pressure due to valve orientation (mbar)						
Flow		3/4"	1"	1-1/2"	2"	2-1/2"	3"	4"
Other ranges 08 mbar spring	↔	0	0	0	0	0	0	0
	↑	+4	+4	+4	+4	+4	+5	+7
	↓	-4	-4	*	*	*	*	*
	↑	+4	+4	+4	+4	+5	+5	+7
	↓	-4	-4	-4	-4	-5	-5	-7

*Valves not suitable for orientation with flow downward when fitted with 8 mbar spring

Service Parts - The HCV03 is a non-maintainable design

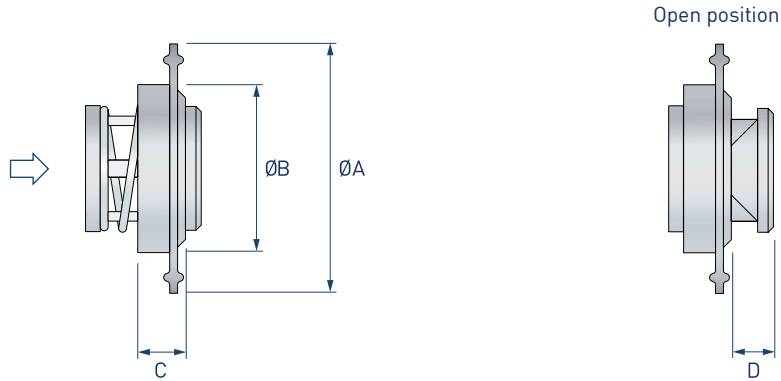

Size ASME BPE	Dimensions (mm)				Kv(m ³ /h)	Weight (grams)
	ØA	ØB	C	D		
3/4"	25	14.9	14.0	15.5	2	16
1"	50.5	21.6	14.0	17.5	4	17
1-1/2"	50.5	34.0	14.0	23.1	8	30
2"	64	46.7	14.5	24.9	18	50
2-1/2"	77.5	59.7	15.2	24.6	32	65
3"	91	72.1	16.3	40.1	65	145
4"	119	96.6	19.8	48.0	120	320

ASME BPE part number ordering key

Product	Size	Connection	Seat seal	Spring
-	-	-	-	-
HCV03	3/4" ASME BPE	075	Clamp C	PTFE T
	1" ASME BPE	100		EPDM EBK
	1-1/2" ASME BPE	150		
	2" ASME BPE	200		
	2-1/2" ASME BPE	250		
	3" ASME BPE	300		
	4" ASME BPE	400		
				8 mbar 08
				35 mbar 35
				100 mbar 100
				240 mbar 240

Example

HCV03	-	075C	-	EBK	-	08
-------	---	------	---	-----	---	----

Specification text

Staitch HCV03 check valve. PTFE construction with 316 stainless steel spring. 3/4" ASME BPE clamp connections. EPDM seat seal. 8 mbar spring. (HCV03-075C-EBK-08)