





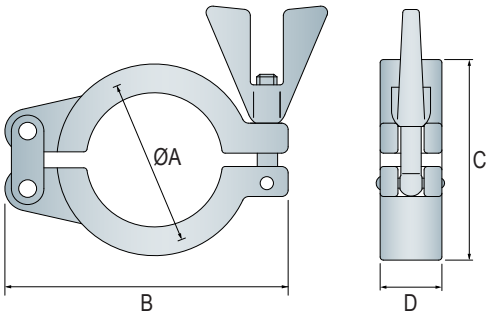




The SH-Type is a double hinge pin construction which provides a more uniform clamping pressure than single pin designs. The SH-Type is well suited to applications where harder gasket types are used. Clamps are manufactured in 316 stainless steel and are available with open wing nut, solid wing nut or hex nut.

-  **Connections**  
To suit 1/2" - 6" ASME BPE clamp fittings
-  **Material**  
316 stainless steel
-  **Surface finish**  
All surfaces - Bright polish
-  **Options**  
Various closure types  
Coloured wing nuts  
(Red, Blue, Black, Yellow and Green)  
Double bolted design  
Machining to suit ported gaskets  
Machining to suit tabbed orifice plates
-  **Available certification**  
 Certificate of Conformity

### SH-Type dimensions

		Clamp end (ASME BPE)	Max Pressure (bar at 150°C)	ØA (mm)	B (mm)	C (mm)	D (mm)
	1/2" / 3/4"	50	25	62	35	17	
	1" / 1-1/2"	50	50.5	92	60	17	
	2"	50	64	105	76	17	
	2-1/2"	50	77.5	125	88	17	
	3"	40	91	140	104	17	
	4"	35	119	168	132	17	
	6"	30	167	247	180	17	

### Wing nut types

Open	Solid	Hex	Coloured
			